


**DESCRIPTION**

**RT-1000 INT – Wall Panels**

RT-1000 INT Panels are constructed using 1 layer of a 6-7# PCF rigid fiberglass core a 1 lb per square foot non-reinforced loaded vinyl noise barrier. Panels are available in 1 1/8" and 2 1/8" thickness, with a maximum size up to 4' X 10' and may be finished in custom, designer or C.O.M. fabric.

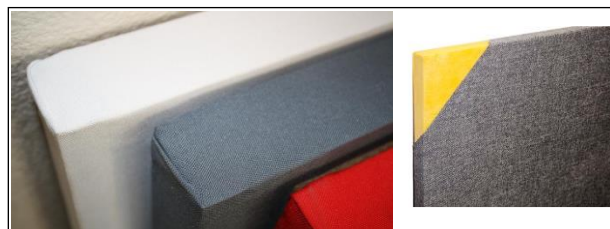

**APPLICATIONS:**

Application for the RT-1000 INT panels includes schools, universities, offices, airports, churches, restaurants and any area where excess reverberation is a problem.

**Product Data:**

**Description**

The RT-1000 INT provides the ultimate in performance with excellent NRC ratings. Available in four standard thicknesses: 1/2", 1", 1 1/2" and 2" with custom thickness available. RT-1000 INT Panels are constructed with a 6-7# PCF rigid fiberglass absorber core. The edges are chemically hardened and are available in 4 edge profiles. R-1000 INT panels are available in standard or custom-sizes (up to a maximum of 5' X 10') with custom, designer or C.O.M fabric available.

Installation of the RT-1000 INT panels is simplistic using mechanical clips, adhesive or hook & loop. Consult with factory on the best-suited mounting for your specific application.

**ACOUSTICAL PERFORMANCE:**

**SOUND ABSORPTION DATA (NRC)**

1/2"	.50 - .60
1"	.80 - .90
1 1/2"	.90 – 1.00
2"	1.05 – 1.15

All components shall have a Class A fire rating per ASTM E-84.